


The Lawrence Model PD is a truly high performance rolling door... designed for 500,000 cycles usage – and with an average operating speed of approximately 24 inches per second to open, 12 inches per second to close. PD High Performance Doors are ideal in very high usage or high speed applications for openings up to 20 ft. wide, 16 ft. high (consult factory for larger sizes).

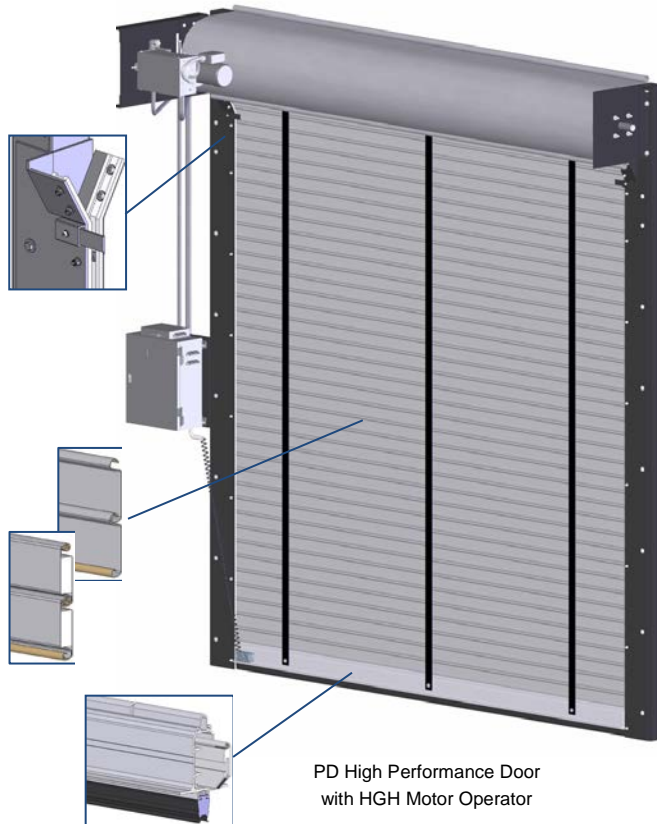

Standard Door Features

- Type 3 standard flat slats or Type 33 insulated slats (R5) – available in galvanized steel, stainless steel, or aluminum
- Delrin endblocks attached to slats to reduce friction
- *Scratch-Guards* protection system to reduce finish wear and operating noise
- Tubular bottom bar fabricated from aluminum extrusions
- Guides fabricated from 1/4" steel shapes with replaceable UHMW wearstrips
- Outer guides are hinged and removable, inner guides are removable, for easy access to curtain for inspection and service
- Springless barrel design – minimum 8 5/8" diameter pipe and 1 1/2" shafts

Standard Safety Features

- Monitored sensing edge to stop and reverse a closing door upon contact with an obstruction – rubber dual-chamber profile design with integral isolated conductive elastomer switches
- Secondary monitored light curtain to stop and reverse a closing door upon sensing an obstruction in the opening.
- If a sensing system fault is detected, door will stay in or return to the open position and revert to constant pressure close function for partial operability until fault is corrected

Standard Operator Features

- High efficiency UL Listed in-line gear drive motor operator
- 2 HP minimum continuous duty motor operates on 208/230v-3ph or 460v-3ph power source
- Auxiliary hoist for emergency hand chain operation in the event of a power failure
- Integral speed governor to prevent curtain free-fall in the event of operator component failure
- Variable speed controller with adjustable soft start/stop feature
- Average operating speed of approximately 24" per second to open, 12" per second to close – slowing substantially prior to full open and full close positions
- Solenoid actuated brake, adjustable limit switches, non-resettable counter, adjustable re-close timer, delay on reverse
- Auxiliary transformer is included to support secondary sensors and ancillary control devices
- Wall mount control panel – connected to the motor operator via pre-assembled wiring harnesses

Standard Clearances

- Head clearance – 25" to 10 ft. high, 27" over 10 ft. to 12 ft. high, 29" over 12 ft. to 14 ft. high, 32" over 14 ft. to 16 ft. high (Allow 2" more for doors with insulated slats)
- Side clearance – 8" each side

PD Doors are warranted against defects in workmanship and materials for 2 years from date of shipment provided designed cycle life is not exceeded. Additional warranty conditions apply.



4525 Littlejohn Street • Baldwin Park, CA 91706
 (626) 869-0837 • Toll Free (866) 939-3399 • Fax (626) 869-0841
www.lawrencedoors.com

PD-1/14

© 2014 Lawrence Roll-Up Doors, Inc.

Lawrence Roll-Up Doors, Inc. reserves the right to change specifications without notice. Refer to Standard Specifications sheets (available upon request) for complete product information.