
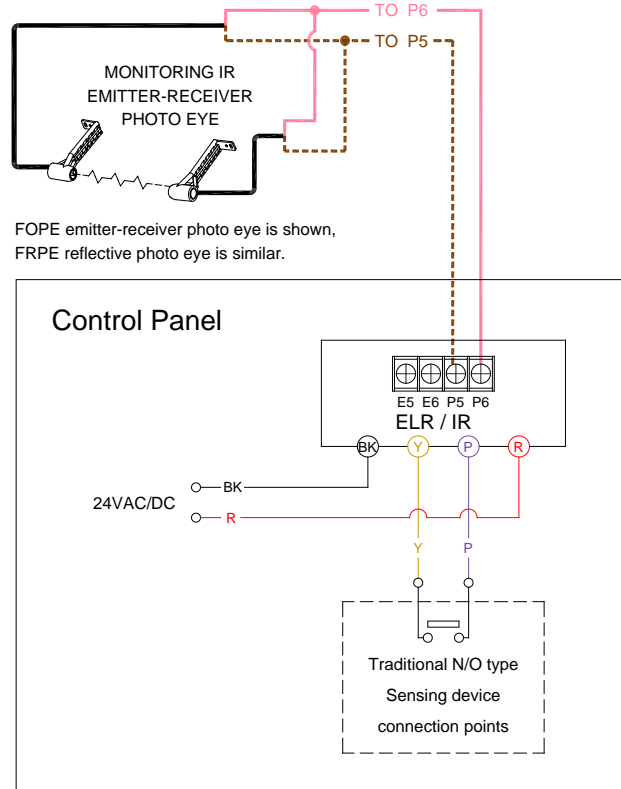


## Monitored Sensing Device Adapter

Allows For Use of a Monitored Sensing Device on Operators without a Monitoring Function

Wiring Diagram for 24VAC/DC Control Systems with N/O Type Output Signal

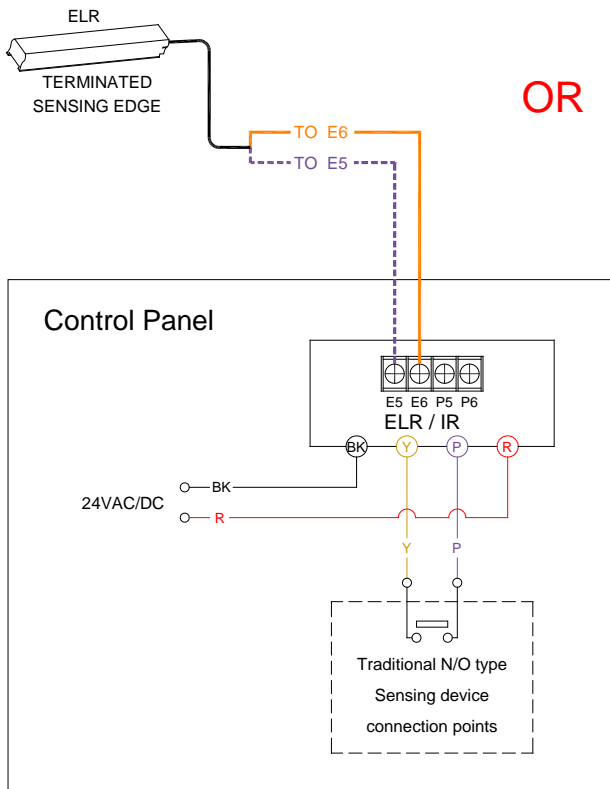

### IMPORTANT NOTES:

1. Only a sensing edge or photo eye with 8.2k Ohms resistance can be used.
2. Only one device can be connected to one adapter – use one adapter for each device.
3. Reference P/N GW40-59-TRA-A01.

