


CLEARANCES					
Door Width "W"	TS	PS	CS	AS	MS
To 8' #	6"	6"	6"	6"	6"
Over 8' to 12'	6 1/2"	N/A	6 1/2"	6 1/2"	6 1/2"
Over 12' to 16'	7 1/2"	N/A	7 1/2"	7 1/2"	7 1/2"
Over 16' to 20'	8"	N/A	8"	8"	8"
Over 20' to 24'	8 1/2"	N/A	8 1/2"	N/A	8 1/2"
Over 24' to 28'	9"	N/A	*	N/A	9"
Over 28' to 30'	10 1/2"	N/A	*	N/A	10 1/2"

For Between Jamb Mount, add 1/4" to dimensions.
 # Use next category for 4-hour rated doors.
 * Consult factory for availability of chain operation over 24' wide.

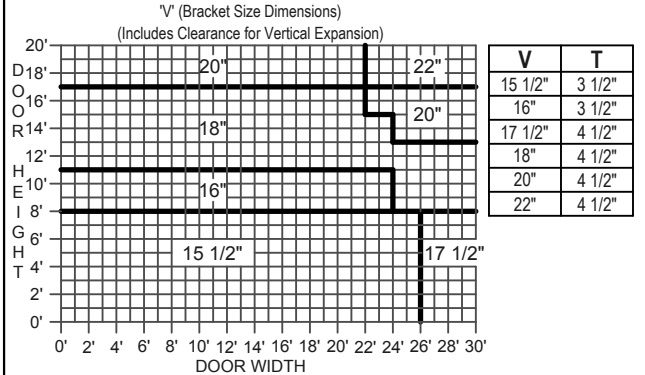

GENERAL NOTES:
 Clearances are based upon standard door construction. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for larger doors and any information not shown.