



SPECIFICATIONS

MAXIMUM SIZE	99 in. wide, 115 in. high
MOUNTING	Face mount (above the header) or between-jamb mount (below the header)
GATE BODY	Square pattern from vertical and horizontal rows of 2/0 link chain, 3/16" thick, on 8" approximate centers (bottom 2 rows are on 4" vertical centers); body is attached to lead and rear bars with steel rivet hooks; top of gate is fitted with top rings
LEAD & REAR BARS	3/16" steel angles
TOP BAR	1 5/16" OD steel tube fitted over cast ductile iron mounting bracket
TOP RINGS	Specially formed steel rings attached to top of gate body and lead bar to slide along top bar
OPERATION	Single slide - stack left side / latch right side
LOCKING	Cast ductile iron housing on lead bar with integral self-latching handle suitable for padlocking
FINISH	Zinc plated gate body with gray color prime paint finish on other steel and iron parts
WARRANTY	One year limited warranty (excluding finish)

FEATURES




Cast Ductile Iron Mounting Bracket




Self Latching Locking Device

GATE DETAILS

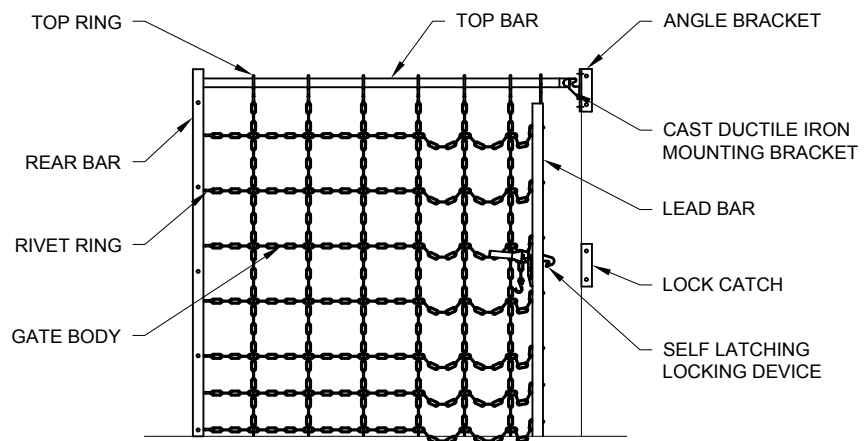


Single Gate (Left Stack Shown, Right Stack Opposite)

JAMB DETAILS




Face Mount

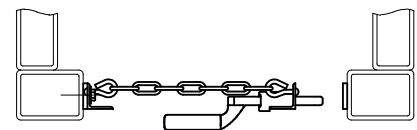

Between-Jamb Mount

HEAD DETAILS



Face Mount Standard Angle Bracket



Below Header Mount

OPTIONS

- Powder Coat Finish hardware
- Galvanized Finish Hardware
- Mesh or Vinyl Privacy Curtain