

A SERIES ROLLING CLOSURES

Our A Series product line offers the same features and benefits as our roll up grilles, but are built with closed panel curtains to enhance security for your retail needs.

FEATURES INCLUDE:

- · Clear polycarbonate panels and solid panels available
- Up to 20,000 operating cycles
- · Lever activated double throw-bolt with mortise thumb turn or cylinder lock standard
- Up to 28' wide and 14' high

COMMON APPLICATIONS:

- Retail
- Banks
- Pharmacies



MADE IN THE USA SINCE 1925



SPECIFICATIONS

MAXIMUM SIZE 28 ft. wide, 14 ft. high, 300 sq. ft. - consult factory for larger sizes

CURTAIN Model AC - interlocking horizontal aluminum panels with clear polycarbonate glazing inserts, framed to prevent abrasion

Model AS - interlocking horizontal solid aluminum panels

BOTTOM BAR Rectangular aluminum extrusion

GUIDES Extruded aluminum channel guides with polyester pile wear strips bolted to steel wall angles or tube supports, field adjustable

lock bar and curtain stop heights

BARREL 6 5/8" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles

BRACKETS 3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel

HOOD NOT STANDARD (available as an option)

OPERATION Push-up to 14 ft. wide, 10 ft. high 120 sq. ft. maximum; chain, crank or motor operation on larger sizes

LOCKS Single cylinder or guarded thumb-turn on coil side and opposite coil side of bottom bar to activate double throw-bolt lock

FINISH Clear anodized aluminum curtain, bottom bar and guide


channels, shop painted black primer on steel wall angles and brackets

WARRANTY One year limited warranty (excluding finish)


COMMON OPTIONS



Bottom Bar With 4" Bottom Plate





MALL PACKAGE



- 1. Motor operator with lock sensor
- 2. Emergency egress handle
- 3. Two flush mounted keystations
- 4. Steel tube supports

CURTAIN & BOTTOM BAR DETAILS








MODEL AS - Solid Panel

Aluminum Bottom Bar

GUIDE DETAILS










Tube Mount Guide*

CLEARANCES (typical face mount AC closure shown - other models simular)

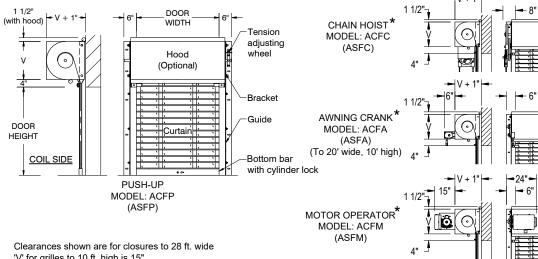

- 'V' for grilles to 10 ft. high is 15"
- 'V' for grilles over 10 ft. is 17"

NOTE: 7" minimum side clearance required over 20 ft. wide or 10 ft. high with tube mount guides

OTHER OPTIONS

- Sloping or irregular shaped bottom bars
- Clear or bronze anodized finish
- Powder coat finish

GENERAL NOTES:

Clearances are based upon standard construction. Reduced clearances and larger sizes may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



4525 Littlejohn Street • Baldwin Park, CA 91706 (626) 869-0837 • Toll Free (866) 939-3399 • Fax (626) 869-0841 www.lawrencedoors.com