

MODEL CD COUNTER DOOR

- C-SERIES

Commonly utilized for small openings, our CD Counter Door has many of the same features and benefits as our service doors, but with a compact design in mind.

FEATURES INCLUDE:

- Great for low headroom and tight sideroom applications
- Up to 20,000 operating cycles
- Optional tubular aluminum bottom bar with cylinder locks available (shown in left photo)
- Tubular (in barrel) motor operator available
- Up to 20' wide and 10' high

COMMON APPLICATIONS:

- Cafeterias
- Pharmacies
- Ticket Booths/Concession Stands
- Schools/Universities



MADE IN THE USA SINCE 1925



SPECIFICATIONS

MAXIMUM SIZE 20 ft. wide, 10 ft. high, 120 sq. ft.

CURTAIN Interlocking 22 gauge galvanized steel or stainless steel or 18 gauge aluminum Type 'F' flat slat with endlocks riveted to alternate

slats

BOTTOM BAR One 2" x 2" x 1/8" steel, stainless steel or aluminum angle with vinyl bottom seal

GUIDES Aluminum extrusions with HDPE wear strips, bolted together and to wall with 3/8" fasteners 24" apart

BARREL 4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles

BRACKETS 1/8" min. steel plates with sealed bearing on operator side and external tension adjustment wheel

HOOD 24 gauge galvanized steel or stainless steel or 20 gauge aluminum

OPERATION Steel and stainless steel doors are push-up to 12 ft. wide, 8 ft. high, 84 sq. ft., awning crank on larger sizes - aluminum doors

are push-up to 14 ft. wide, 8 ft. high, 96 sq. ft., awning crank on larger sizes


LOCKS Slide locks on coil side of bottom bar

FINISH Baked-on primer and grey top coat on slats and hood, shop painted black primer on steel bottom bar, and brackets - brushed

finish on stainless steel slats, bottom bar and hood - clear anodized finish on aluminum slats, bottom bar, guides and hood

WARRANTY One year limited warranty (excluding finish)

COMMON OPTIONS



CURTAIN & BOTTOM BAR DETAILS



Type 'F' Flat Slat



Angle Bottom Bar

1 1/2

TUBULAR


MOTOR OPERATOR

MODEL: CDFM

GUIDE DETAILS



Face Mount



Steel or stainless steel tubular bottom bar



OTHER OPTIONS

Vinyl hood baffle

mullions


Galvanized or

Guide bottom capsFixed or removable

powder coat finishes

• Stainless steel counter top

CLEARANCES (typical face mount door shown)

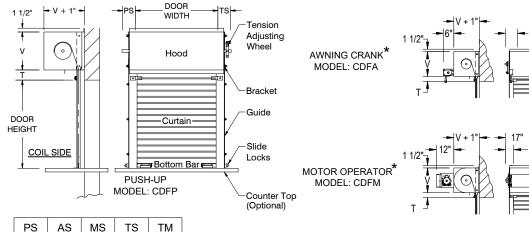

10	70	IVIO	13	IIVI
5"	5"	5"	5"	5"

Add 3/4" for face mount to masonry jambs

- 'V' for doors to 6 ft. high is 10"
- 'V' for doors over 6 ft. high is 12"
- 'T' for doors with angle bottom bar is 2"
- 'T' for doors with tubular bottom bar is 4"

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for anyinformation not shown.

Available as an option



4525 Littlejohn Street • Baldwin Park, CA 91706 (626) 869-0837 • **Toll Free (866) 939-3399** • Fax (626) 869-0841 www.lawrencedoors.com

CD-04/23