

MODEL MD

STOCK SERVICE DOORS

M-SERIES

You can have one picked up or shipped as soon as the same day you order it! (Subject To Availability)

FEATURES INCLUDE:

- Up to 20,000 operating cycles
- Push up operation on smaller sizes; Manual chain hoist operation on larger size doors.
- Low compact flat slat design
- Aluminum bottom bar
- Factory baked on primer gray finish
- Left Hand operation standard (Right Hand operation optional)

COMMON APPLICATIONS:

- Auto-Dealerships
- Warehouses
- Mechanic Shops
- Trash Rooms
- Retail




LAWRENCE
DOORS

MADE IN THE USA
SINCE 1925


SPECIFICATIONS

STOCK SIZES	8 ft. x 8 ft. 8 ft. x 10 ft. 10 ft. x 10 ft. 10 ft. x 12 ft. 12 ft. x 10 ft. 12 ft. x 12 ft. 12 ft. x 14 ft.
CURTAIN	Interlocking 24 gauge galvanized steel Type 'F' flat slats with endlocks riveted to alternate slats, designed to withstand a 20 PSF windload
BOTTOM BAR	T-shape aluminum extrusion with vinyl weatherstrip
GUIDES	Formed 11 gauge steel U-channel guides and 3/16" steel wall angles bolted together and to wall with 3/8" fasteners 24" apart
BARREL	4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 20,000 operating cycles
BRACKETS	3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel
HOOD	24 gauge galvanized steel
OPERATION	Push-up to 10 ft. wide, 8 ft. high, chain hoist with cast iron reduction gears on larger sizes
LOCKS	Slide locks on coil side or opposite coil side of bottom bar
FINISH	Baked-on primer and grey top coat on slats and hood, mill finish aluminum bottom bar, shop painted black primer on guides and brackets
WARRANTY	One year limited warranty (excluding finish)

COMMON FEATURES

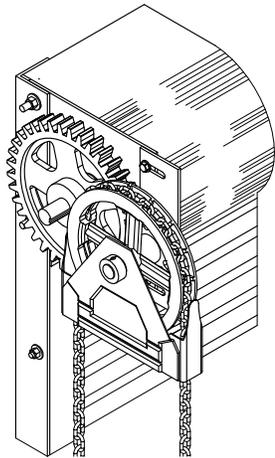

CHAIN HOIST WITH CAST IRON GEARS



SLIDELOCKS & VINYL WEATHERSTRIP

AVAILABLE OPTIONS

- GUIDE WEATHERSTIP
- MOTOR OPERATION
- SENSING EDGE

CURTAIN & BOTTOM BAR DETAILS




Type 'F' Flat Slat




Aluminum Bottom Bar

GUIDE DETAILS




Type 'Z' Guide




Type 'E' Guide

CLEARANCES

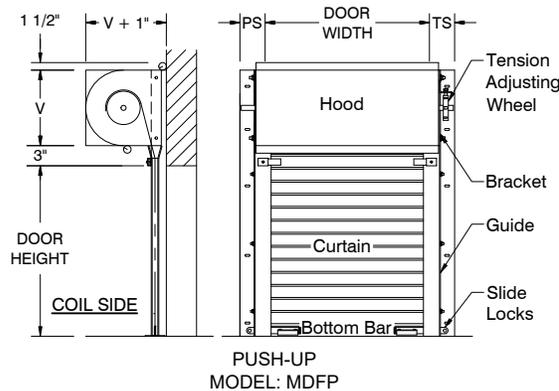


PS	CS	MS	TS
6"	8"	7"	7"


'V' for doors to 12 ft. high is 12"
'V' for doors over 12 ft. high is 15"

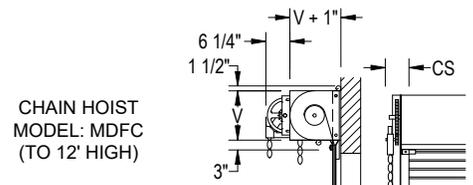

CHAIN HOIST MODEL: MDFC (TO 12' HIGH)

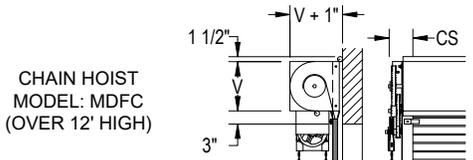

CHAIN HOIST MODEL: MDFC (OVER 12' HIGH)

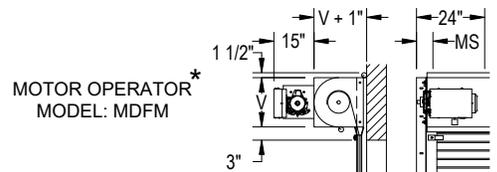

MOTOR OPERATOR* MODEL: MDFM

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option



MODEL MD

STOCK SERVICE DOORS

— M-SERIES —

You can have one picked up or shipped as soon as the same day you order it! (Subject To Availability)

FEATURES INCLUDE:

- Up to 20,000 operating cycles
- Push up operation on smaller sizes; Manual chain hoist operation on larger size doors.
- Low compact flat slat design
- Aluminum bottom bar
- Factory baked on primer gray finish
- Left Hand operation standard (Right Hand operation optional)

COMMON APPLICATIONS:

- Auto-Dealerships
- Warehouses
- Mechanic Shops
- Trash Rooms
- Retail




LAWRENCE
DOORS

MADE IN THE USA
SINCE 1925


SPECIFICATIONS

STOCK SIZES	8 ft. x 8 ft. 8 ft. x 10 ft. 10 ft. x 10 ft. 10 ft. x 12 ft. 12 ft. x 10 ft. 12 ft. x 12 ft. 12 ft. x 14 ft.
CURTAIN	Interlocking 24 gauge galvanized steel Type 'F' flat slats with endlocks riveted to alternate slats, designed to withstand a 20 PSF windload
BOTTOM BAR	T-shape aluminum extrusion with vinyl weatherstrip
GUIDES	Formed 11 gauge steel U-channel guides and 3/16" steel wall angles bolted together and to wall with 3/8" fasteners 24" apart
BARREL	4 1/2" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 20,000 operating cycles
BRACKETS	3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel
HOOD	24 gauge galvanized steel
OPERATION	Push-up to 10 ft. wide, 8 ft. high, chain hoist with cast iron reduction gears on larger sizes
LOCKS	Slide locks on coil side or opposite coil side of bottom bar
FINISH	Baked-on primer and grey top coat on slats and hood, mill finish aluminum bottom bar, shop painted black primer on guides and brackets
WARRANTY	One year limited warranty (excluding finish)

COMMON FEATURES

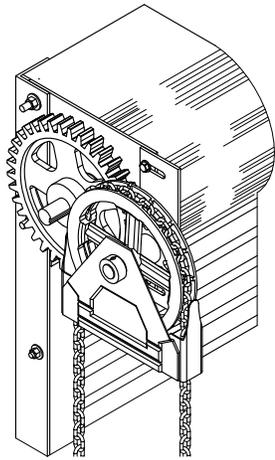

CHAIN HOIST WITH CAST IRON GEARS



SLIDELOCKS & VINYL WEATHERSTRIP

AVAILABLE OPTIONS

- GUIDE WEATHERSTIP
- MOTOR OPERATION
- SENSING EDGE

CURTAIN & BOTTOM BAR DETAILS




Type 'F' Flat Slat




Aluminum Bottom Bar

GUIDE DETAILS




Type 'Z' Guide



Type 'E' Guide


CLEARANCES

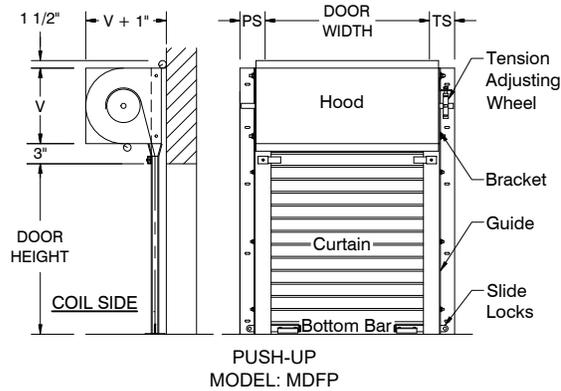


PUSH-UP MODEL: MDFP

PS	CS	MS	TS
6"	8"	7"	7"


'V' for doors to 12 ft. high is 12"
'V' for doors over 12 ft. high is 15"

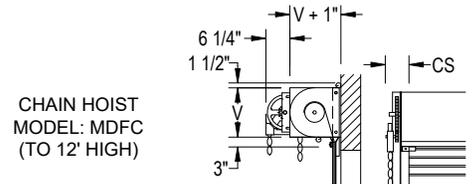

CHAIN HOIST MODEL: MDFC (TO 12' HIGH)

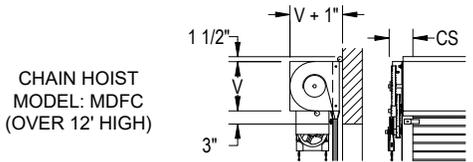

CHAIN HOIST MODEL: MDFC (OVER 12' HIGH)

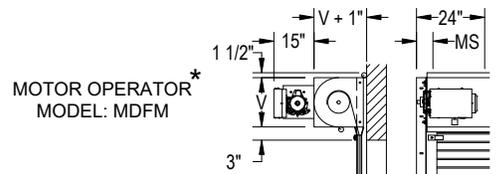

MOTOR OPERATOR* MODEL: MDFM

GENERAL NOTES:

Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Shop drawings for specific applications are available. Consult factory for any information not shown.

* Available as an option