

CLEARANCES


Door Width "W"	TS	PS	CS#	MS
To 10'	5 1/2"	5 1/2"	5 1/2"	5 1/2"
Over 10' to 14'	6"	N/A	6"	6"

Add 2 1/4" to CS on doors over 12' high.
For Between Jamb Mount:
Add 3/4" to TS, PS, CS, MS on doors to 12' high.
Add 3/4" to TS, PS, MS doors over 12' high.

V' (Bracket Size Dimensions)

V	T
12"	3 1/2"
15"	3 1/2"

DOOR WIDTH

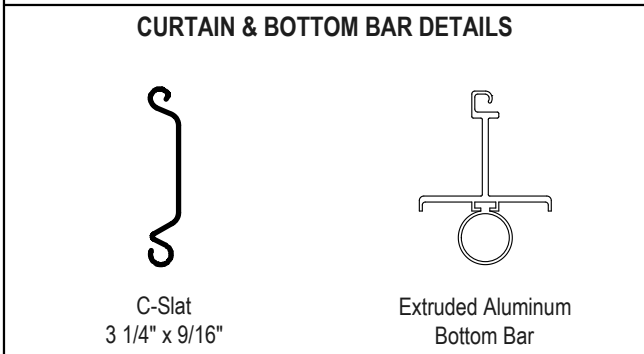

GENERAL NOTES:
Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Drive side shaft may need to be field cut to fit in clearances shown. Shop drawings for specific applications are available. Consult factory for any information not shown.