


\*"AUTO-RESET" INCREASES HEIGHT OF CHAIN & CRANK OPERATORS BY APPROXIMATELY 3"

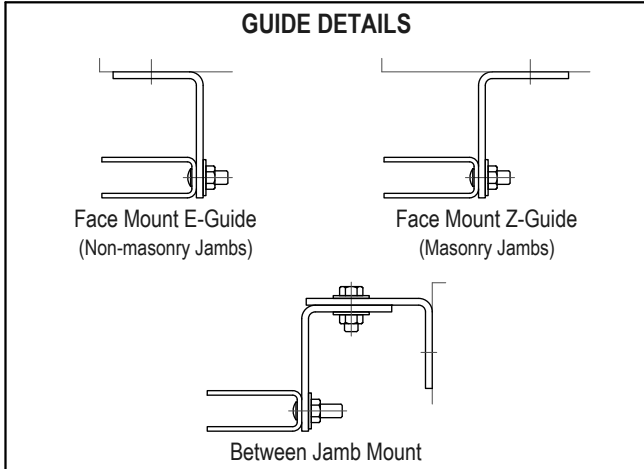

**CLEARANCES**

Door Width "W"	TS	PS	CS	AS	MS
To 8' #	5 1/2"	5 1/2"	5 1/2"	5 1/2"	5 1/2"
Over 8' to 12'	6"	6"	6"	6"	6"
Over 12' to 14'	6 1/2"	N/A	6 1/2"	6 1/2"	6 1/2"

For Between Jamb Mount, add 3/4" to dimensions.  
# Use next category for 4-hour rated doors.

V (Bracket Size Dimensions)  
(Includes Clearance for Vertical Expansion)

V	T
12 1/2"	3 1/2"
13"	3 1/2"
16"	3 1/2"

**GENERAL NOTES:**  
Clearances are based upon standard door construction. Reduced clearances may be available. Some options may require additional clearance. Drive side shaft may need to be field cut to fit in clearances shown. Shop drawings for specific applications are available. Consult factory for any information not shown.

