

F SERIES

The F Series Side Folding Closures offer a compact and effective security solution for minimal headroom applications such as kiosks, parcel shipping stores, and mall storefronts.

FEATURES INCLUDE:

- Multiple curtain types available (Grille, Open, Solid, and Clear Polycarbonate Panels)
- Minimal headroom clearance (Up to 2")
- Multiple curves available for flexibility (30°, 45°, and 90° with 14" radius)
- Fits into pocket storage spaces when not in use.

COMMON APPLICATIONS:


- Retail
- UPS/FedEx Stores
- Banks
- Mall Storefronts



MADE IN THE USA **SINCE 1925**



SPECIFICATIONS	
MAXIMUM SIZE	30 ft. wide, 12 ft. high (consult factory for larger sizes)
CURTAIN	Folding 6 1/2" wide extruded aluminum panels interconnected with integral continuous vertical hinges
	Model FO - panels divided by vertical aluminum rods and horizontal stiffeners in a 2 5/16" wide, 12" high open pattern
	Model FC - panels with clear polycarbonate glazing inserts to provide a closed panel with visibility
	Model FS - panels fabricated from solid aluminum
	Model FG - horizontal links interconnected with vertical rods in a 3" wide, 12" high pattern
POSTS	Rectangular aluminum extrusion connected to lead and rear panels and intermediately every 10 ft. (and corners as required)
LOCKS	Cylinder activated hook lock in lead post with full height wall strike; cylinder activated bottom throw-bolt lock in receiver
	and intermediate posts (when provided) with floor strike; self-locking tailing edge on rear post engages floor & ceiling stop
TOP TRACK	Extruded aluminum, 1 3/4" x 1 5/8" x 1/8" thick with steel connetion plate/pins at each splice
ROLLERS	Non-metallic 1 1/8" double-wheeled ball bearing rollers
FINISH	Mill finish (FG), clear anodized (FO, FC, FS) aluminum curtain, posts and top track
WARRANTY	One year limited warranty (excluding finish)

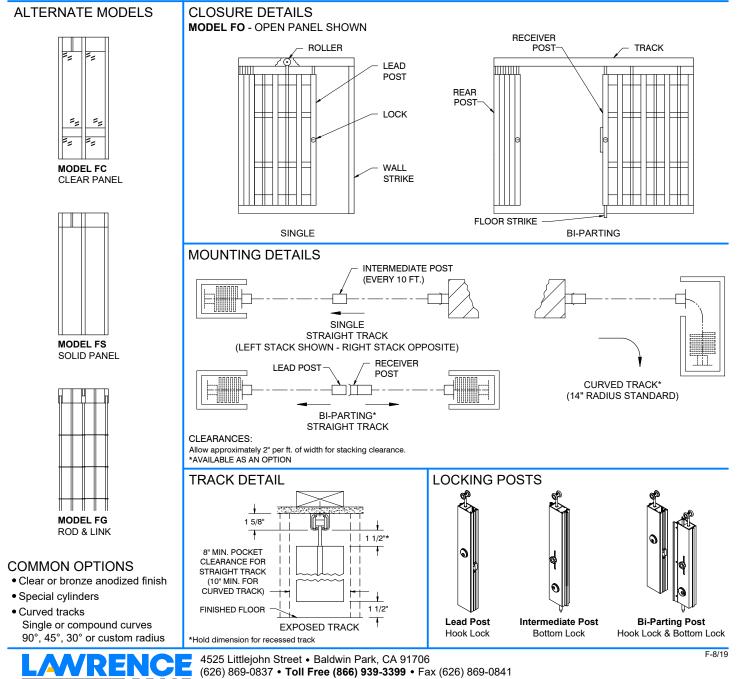

^{© 2019} Lawrence Roll-Up Doors, Inc.

Lawrence Roll-Up Doors, Inc. reserves the right to change specifications without notice. Refer to Standard Specifications sheets (available upon request) for complete product information.