

FOLDING GATES

Designed to meet the need of the average buyer, the LT Gate is a great solution for every day applications in retail spaces and warehouses to control foot traffic and provide security.

FEATURES INCLUDE:

- Optional outriggers available for easy maneuverability and stability
- Durable zinc finish standard (Optional Black and Gray Finishes Available)
- Up to 26' wide and 6' 6" extended height
- Portable version available

COMMON APPLICATIONS:

- Warehouses/Dock Doors
- Storefronts
- Market Aisles
- Corridors
- Pharmacies
- Airports




LAVRENCE


MADE IN THE USA SINCE 1925



SPECIFICATIONS MAXIMUM SIZE 13 ft. wide (single gate) or 26 ft. wide (bi-parting gate), 6 ft. high (extended) GATE BODY Diagonal 14 gauge steel lattice channels in a diamond pattern, spaced approximately 6" apart, riveted back-to-back through zinc plated steel washers between channels, non-metallic vertical rollers enclosed in lead and rear bars, vertical intermediate supports on single gate sections over 8 ft. wide 14 gauge formed steel box channels **LEAD & REAR BARS** GATE PIVOT Malleable iron casting at top and bottom of rear bar LOCKING Hasp suitable for padlocking gate in closed position (full height lock post on single gate), 3/4" cane bolt on lead bar of bi-parting gate or intermediate support on single gate, pivoting steel tie-back arm to hold gate in open position **BOTTOM CASTER** Hard rubber 2" swivel caster on bottom of lead bar FINISH Hot-dip gavlanized, or factory applied black or gray paint WARRANTY One year limited warranty (excluding finish)

COMMON OPTIONS










Gate cabinets surface mount shallow cabinet shown, recessed or deep cabinet designs available

OTHER OPTIONS

- LT Series folding gates are also available as portable gates
- Powder Coat Finish
- Mesh or Vinyl Privacy Curtains



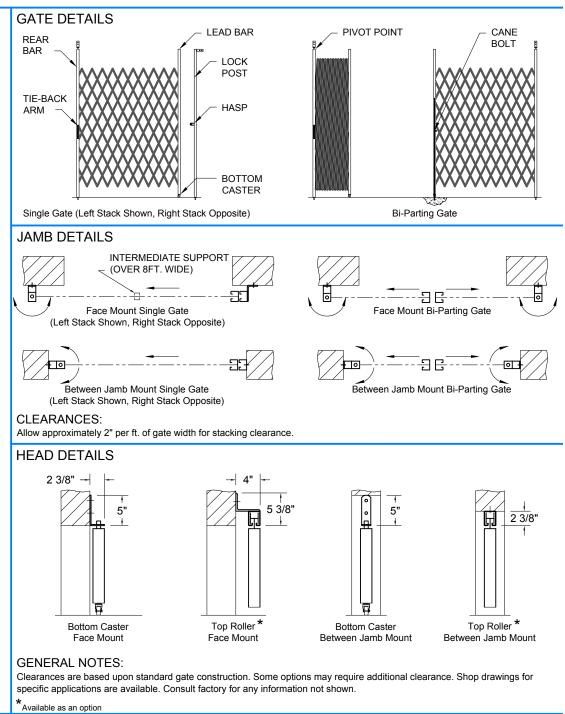

4525 Littlejohn Street • Baldwin Park, CA 91706 (626) 869-0837 • **Toll Free (866) 939-3399** • Fax (626) 869-0841 www.lawrencedoors.com LT-12/17

Lawrence Roll-Up Doors, Inc. reserves the right to change specifications without notice. Refer to Standard Specifications sheets (available upon request) for complete product information.