

A SERIES ROLLING CLOSURES

Our A Series product line offers the same features and benefits as our roll up grilles, but are built with closed panel curtains to enhance security for your retail needs.

FEATURES INCLUDE:

- Clear polycarbonate panels and solid panels available
- Up to 20,000 operating cycles
- Lever activated double throw-bolt with mortise thumb turn or cylinder lock standard
- Up to 28' wide and 14' high

COMMON APPLICATIONS:

- Retail
- Banks
- Pharmacies












SPECIFICATIONS	
MAXIMUM SIZE	28 ft. wide, 14 ft. high, 300 sq. ft consult factory for larger sizes
CURTAIN	Model AC - interlocking horizontal aluminum panels with clear polycarbonate glazing inserts, framed to prevent abrasion
	Model AS - interlocking horizontal solid aluminum panels
BOTTOM BAR	Rectangular aluminum extrusion
GUIDES	Extruded aluminum channel guides with polyester pile wear strips bolted to steel wall angles or tube supports, field adjustable
	lock bar and curtain stop heights
BARREL	6 5/8" min. steel pipe and solid steel shaft with sealed bearing and torsion spring(s) designed for 10,000 operating cycles
BRACKETS	3/16" min. steel plates with sealed bearing on operator side and external tension adjustment wheel
HOOD	NOT STANDARD (available as an option)
OPERATION	Push-up to 14 ft. wide, 10 ft. high 120 sq. ft. maximum; chain, crank or motor operation on larger sizes
LOCKS	Single cylinder or guarded thumb-turn on coil side and opposite coil side of bottom bar to activate double throw-bolt lock
FINISH	Clear anodized aluminum curtain, bottom bar and guide
	channels, shop painted black primer on steel wall angles and brackets
WARRANTY	One year limited warranty (excluding finish)

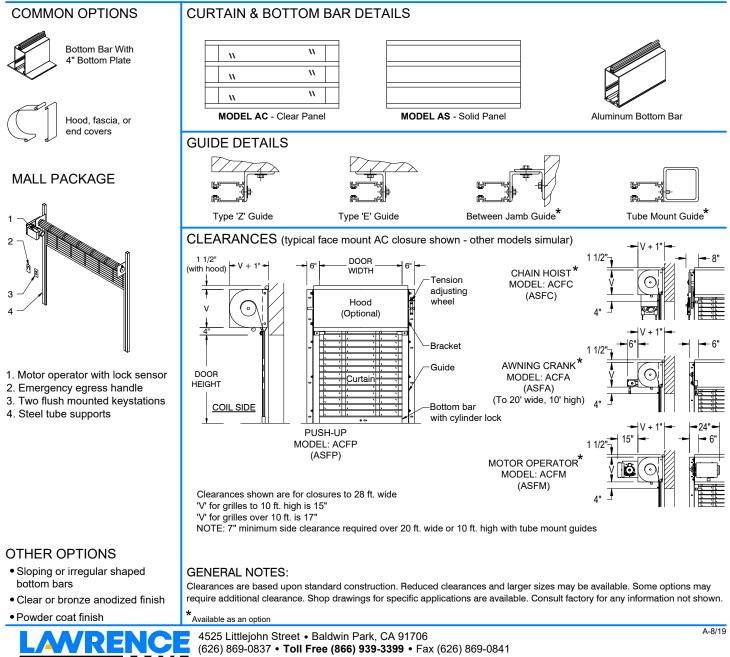

DIOIORS www.lawrencedoors.com

© 2019 Lawrence Roll-Up Doors, Inc.

Lawrence Roll-Up Doors, Inc. reserves the right to change specifications without notice. Refer to Standard Specifications sheets (available upon request) for complete product information.